



John C Wilkins
Acoustic Supplies


DATA SHEET

JCW ACOUSTIC BATTEN 50

THE PRODUCT

A flexible batten floor system, JCW Acoustic Batten 50 is ideal where service runs need to be accommodated but floor heights are limited. It complies with Part E of the Building Regulations and is certified for use with relevant Robust Standard Detail floor constructions. This low cost product is easy to install and always available for fast delivery nationwide.

THE FACTS

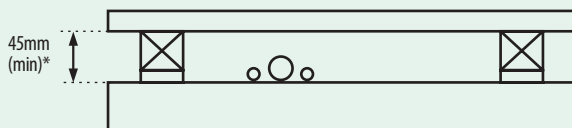

- Resilient composite batten floor system (type FFT3), comprising a resilient layer, pre-bonded to a standard 45 x 35 nominal batten.
- For use with Robust Standard Detail floor construction types E-FC-1, E-FC-2, E-FC-7 and E-FS-1 (steel floor).
- Suitable for use beneath lightweight internal partitions.
- Ideal for pre-cast and beam&block floors.
- JCW Perimeter Flanking Band must be used to ensure compliance.
- Alternative size battens also available to order.



SPECIFICATION

Composition	15mm JCW Acoustic foam/ softwood Timber Batten
Standard Height	50mm although alternative size battens are also available to order
Dimension	1800mm x 45mm
RSD compliance requirement	$\text{dB}\Delta L_w$: 17dB
JCW Acoustic Batten 50 rating	$\text{dB}\Delta L_w$: 21dB

INSTALLATION

Please find all installation advice in our separate guide.

For expert installation, we offer our own installation service anywhere in the UK. Your installation will be performed to the highest standards by skilled and experienced tradesmen. These experts understand the importance of fitting acoustic materials absolutely perfectly, and they have the specialist skills to ensure your JCW materials are fitted correctly every time. As they are both experienced and skilled, they are also able to provide a highly efficient and extremely cost-effective service.

For further details, call John C Wilkins Acoustic Installations on 01204 387 029.

