



John C Wilkins
Acoustic Supplies

DATA SHEET


JCW ACOUSTIC BATTEN TF80

THE PRODUCT

With an impact sound improvement of 19dB, JCW Acoustic Batten TF80 is the very best product on the market for timber frame construction. It complies with Part E of the Building Regulations and is certified for use with relevant Robust Detail floor constructions. This product is economical, easy to install and always available for fast delivery nationwide.



THE FACTS

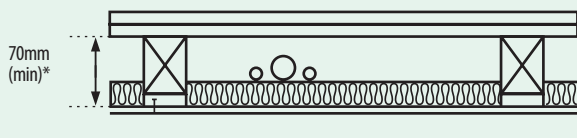

- Resilient composite batten floor system, comprising a resilient layer pre-bonded to a standard 45 x 60 nominal batten.
- Tested and certified for use with Robust Detail floor construction types E-FT-1 and E-FT-2 timber frame construction.
- Ideal for all types of wooden sub floors.
- JCW Perimeter Flanking Band must be used to ensure compliance.
- Standard height is 80mm, although alternative size battens are available to order.

SPECIFICATION

Composition	20mm JCW Acoustic foam/ softwood Timber Batten
Standard Height	80mm although alternative size battens are also available to order
Dimension	1800mm x 45mm
Airbourne Sound Improvement	$\text{dB}\Delta R_w + \text{Ctr}$: 15dB
Impact Sound Improvement	$\text{dB}\Delta L_w$: 19dB

INSTALLATION

Please find all installation advice in our separate guide.

For expert installation, we offer our own installation service anywhere in the UK. Your installation will be performed to the highest standards by skilled and experienced tradesmen. These experts understand the importance of fitting acoustic materials absolutely perfectly, and they have the specialist skills to ensure your JCW materials are fitted correctly every time. As they are both experienced and skilled, they are also able to provide a highly efficient and extremely cost-effective service.

For further details, call John C Wilkins Acoustic Installations on 01204 387 029.

